

CANDYPOPTM

In Touch With tomorrow

INTERACTIVE PANEL

PRODUCT CATALOGUE

new

android 11 



FUTURES

Easy and efficient interaction with the help of all New built-in Android 11 OS

Smooth and Natural Writing Experience

New Gen Type-C Compatibility

High-Speed Data Transmission (1000 Mbps)

Stunning 4K UHD Visuals

Sleek & Slim Appearance

40-point touch

OPS (Optional)

HIGH ACCURATE TOUCH EXPERIENCE



LESS THAN 4 MS LATENCY



40-POINT TOUCH:
MULTI-USERS CAN WRITE
DRAW AND MARK
SIMULTANEOUSLY





DUAL-TIP STYLUS SUPPORTS
WRITING WITH TWO
DIFFERENT COLORS




Flexible Windowed Displays


You can easily read and control your content when standing in front of your panel. You can drag and drop information between the apps. The window is flexible, easy-to-use, designed specifically for Large-screen and Classroom.

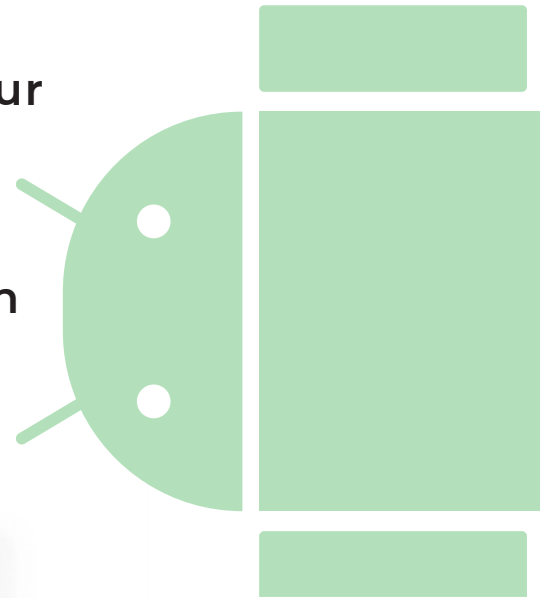


Graphic recognition




Shape recognition



Handwriting recognition



Smart search

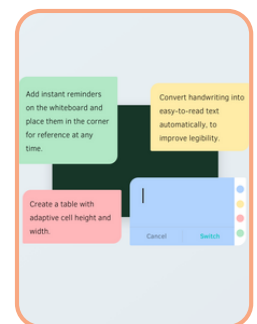

Instant note

COMPATIBILITY



SHARE EFFORTLESSLY

DISCUSSION NOTE, IDEAS, PRESENTATION NOTATION, AND MEETING MINUTES SHARE WITH JUST QR SCAN.



MULTIPLE SHARE SCREENS

CONNECT UP TO 8 DEVICES SCREEN AND DISPLAY 4 SCREENS AT THE SAME TIME WITHOUT CABLE.



EASY CONTROL

CONTROL YOUR COMPUTER DIRECTLY FROM CANDYPOP PANEL WITH
*OPTIONAL WIRELESS DONGLE

AG GLASS




- AG tempered glass 4mm Mohs.
- level 7: anti-scratch and anti-collision.
- no margin round design, more secure.
- Insensitive to incident sunlight.
- adjust brightness automatically.
- save energy and protect your eyesight.

STUNNING 4K UHD VISUALS

4K
ULTRA HD



EDUCATION

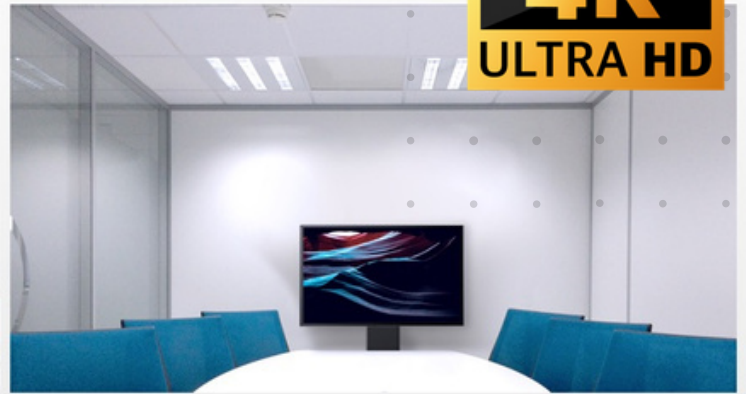

CORPORATE

POWERFUL AND CRISP SOUND

ADOPTING A SPECIAL CAVITY ACOUSTIC STRUCTURE DESIGN, TO PRESENT RICH, WIDE, DELICATE SOUND AND LET EVERY PARTICIPANTS ENJOY EXTRAORDINARY CLEAR AUDITORY SENSE.



TECHNICAL SPECIFICATION

Model	CP-IR65Pro	
Display	Size	65 inch
	Panel Type	ADS
	Back Light Unit	DLED
	Response Time	8ms
	Aspect Ratio	16:09
	Display Area(HxV)	1428.48(H)×803.52(V)mm
	Pixel Pitch	0.372(H)×0.372(V)mm
	Resolution	3840×2160
	Refreshing Frequency	60Hz
	Display Color	1.07B
	Bit Rate	10bit
	NTSC Gamut	68%
	Contrast Ratio	1200:1
	Viewing Angle	178°(H/V)
	Brightness with glass(min)	300 cd/m ² 300 cd/m ²
Brightness with glass(typ)	350 cd/m ² 350 cd/m ²	
Life Time	≥50000 Hours	
Operating System	System Version	Android 11.0
	RAM	4GB
	ROM	32GB
	CPU	ARM 1.8 GHZ A55×4
	GPU	Mali G52MP2
Touch System	Sensing Type	Infrared recognition
	Touch Recognition	Finger, Passive infrared pen
	Accuracy	±1.5mm
	Touch Point	40
	Minimum object Size	3mm
	Writing Height	≤3mm
Audio	System	Windows/Android
	Audio Output	2.0
Power	Output Power	2×20W
	Power Supply	100-240V, 50/60Hz
I/O Interface	Standby Power	≤0.5W
	HDMI In	3
	HDMI Out	1
	USB 2.0	1
	USB Type-C	1
	USB 3.0	4
	Touch Out	2
	VGA In	1
	Audio/MIC In	1
	Audio Out	1
	SPDIF	1
	RS232	1
	RJ45 In	1
RJ45 Out	1	
Physical Specifications	Dimension (L×H×D)	1488.4×896.6×87.2mm
	Package Dimension(L×W×H)	1628×208×1005mm
	VESA	800×400mm
	Net Weight	34.95Kg
Accessories	Gross Weight	44.70Kg
	Power Cord	1
	HDMI Cable	1
	USB Touch Cable (Type A-B)	1
	Remote Control	1
Environmental Conditions	Writing Pen	2
	Operation Temperature	0° C ~ 40° C
	Operation Humidity	10% ~ 90%RH
	Storage Temperature	-20° C ~ 60° C
Optional PC Module	Storage Humidity	10% ~ 90%RH
	Altitude	Below 5000 Meter
	PC Module	OPS62A
	Wireless Module	SI07